


UL電線対応&UL規格フェルール

特徴

- ・耐熱110℃の絶縁ポリプロピレンスリーブ。
- ・素材はTIN PLATED COPPER。
- ・インフィードコーンに難熱素材を使用。
- ・DIN46228 part4 (0.5~50sqのドイツ工業規格) 適合品。
- ・Z+F製0.14~50sqはUL認証済。(認証No.20111214-E333905)

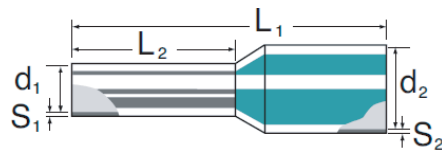

sq	AWG	L2		L1		d1		d2				品番			
		Z+F	GLW	Z+F	GLW	Z+F	GLW	UL線用		一般		UL線用		一般	
								Z+F	GLW	Z+F	GLW	W	DIN	W	DIN
0.25	24	6	6	10	10.5	0.85	0.8			1.8	2.0			0.25/6-水色	0.25/6-黄
0.34	22	6	6	10	10.5	0.85	0.8	2.6		2.0	2.0	0.34/6 UL-青緑		0.34/6-W青緑	0.34/6-DIN青緑
0.5	20	8	8	14	13.5	1.0	1.1	2.9	3.0	2.6	2.5	0.5/8 UL-橙	0.5/8 UL-白	0.5/8-橙	0.5/8-白
0.5	20	10	10	16	15.5	1.0	1.1		3.0	2.6	2.5		0.5/10 UL-白	0.5/10-橙	0.5/10-白
0.5	20	12		18		1.0				2.6				0.5/12-橙	0.5/12-白
0.75	18	6	6	12	12	1.2	1.3			2.8	2.8			0.75/6-白	0.75/6-灰色
0.75	18	8	8	14	14	1.2	1.3	3.4	3.4	2.8	2.8	0.75/8 UL-白	0.75/8 UL-灰色	0.75/8-白	0.75/8-灰色
0.75	18	10	10	16	16	1.2	1.3		3.4	2.8	2.8		0.75/10 UL-灰色	0.75/10-白	0.75/10-灰色
0.75	18	12	12	18	18	1.2	1.3			2.8	2.8			0.75/12-白	0.75/12-灰色
1	17	6	6	12	12.5	1.4	1.5			3.0	3.0			1/6-黄	1/6-赤
1	17	8	8	14	14.5	1.4	1.5	3.5	3.4	3.0	3.0	1/8 UL-黄	1/8 UL-赤	1/8-黄	1/8-赤
1	17	10	10	16	16.5	1.4	1.5		3.4	3.0	3.0		1/10 UL-赤	1/10-黄	1/10-赤
1	17	12	12	18	18.5	1.4	1.5			3.0	3.0			1/12-黄	1/12-赤
1.5	16	6	6	12	12.5	1.7	1.8			3.0	3.0			1.5/6-赤	1.5/6-黒
1.5	16	8	8	14	14.5	1.7	1.8	4.0	3.8	3.5	3.4	1.5/8 UL-赤	1.5/8 UL-黒	1.5/8-赤	1.5/8-黒
1.5	16	10	10	16	16.5	1.7	1.8		3.8	3.5	3.4		1.5/10 UL-黒	1.5/10-赤	1.5/10-黒
1.5	16	12	12	18	18.5	1.7	1.8			3.5	3.4			1.5/12-赤	1.5/12-黒
2.08	14	8	8	15	14.5	2.05	2.05			4.2	3.6			2.08/8-W黄	2.08/8-DIN黄
2.5	14	8	8	15	15	2.2	2.3			4.2	4.2			2.5/8-W青	2.5/8-DIN青
2.5	14	10	10	17	17	2.2	2.3			4.2	4.2			2.5/10-W青	2.5/10-DIN青
2.5	14	12	12	19	19	2.2	2.3			4.2	4.2			2.5/12-W青	2.5/12-DIN青
2.5	14		18		25		2.3			4.2				2.5/18-W青	2.5/18-DIN青
4	12	10	10	18	18	2.8	2.9			4.8	4.8			4/10-W灰色	4/10-DIN灰色
4	12	12	12	26	20	2.8	2.9			4.8	4.8			4/12-W灰色	4/12-DIN灰色
4	12		18		26		2.9			4.8				4/18-W灰色	4/18-DIN灰色
6	10	12	12	20	20	3.5	3.6			6.3	6.2			6/12-黒	6/12-黄
6	10		18		26		3.6			6.2				6/18-黒	6/18-黄
10	8	12	12	22	21	4.5	4.6			7.6	7.5			10/12-アイボリー	10/12-赤
10	8		18		27		4.6			7.5				10/18-アイボリー	10/18-赤
16	6	12	12	23	23	6.0	6.0			8.8				16/12-緑	16/12-青
16	6		18		29		6.0			8.8				16/18-緑	16/18-青
25	4		16		29		7.5			11.0				25/16-茶	25/16-黄
35	2		16		30		8.5			12.5				35/16-ベージュ	35/16-赤
50	1		20		36		10.5			15.0				50/20-オリーブ	50/20-青
70	2/0		20		37		12.7			16.0				70/20-W黄	70/20-DIN黄
95	3/0		25		44		14.7			18.0				95/25-W赤	95/25-DIN赤

※ フェルールにはDINコードとWコードがあり、色はサイズにより異なります。
 ※ GLW製フェルールはUL規格未取得です。

